

# Pinyue

Integral Chest Freezer (Plug In)




## Technical Data

	Model	Dimensions/mm	Temperature Range/°C	Net Volume/L	Display Area/m <sup>2</sup>	Refrigerant	Frequency
2500 Straight Cabinet	LD-ICF250808C	2504*853*945	≤ -18	796	1.72	R404A	50
	LD-ICF220808C	2204*853*945	≤ -18	687	1.51	R404A	50
1840 End Cabinet	LD-ICF150808C	1844*853*825	≤ -18	446	1.21	R404A	50
	LD-ICF180807C	1504*853*945	≤ -18	431	0.99	R404A	50

## Product Features

- ⑥ Left and right sliding door, large display area
- ⑥ Dual load line, with stable temperature performance and reliable quality
- ⑥ Hot gas defrosting, energy saving and environmental protection
- ⑥ Reducing the external heat dissipation temperature and improving the shopping experience.
- ⑥ High load line ≤ -18 °C 450mm, ≤ -20°C 550mm

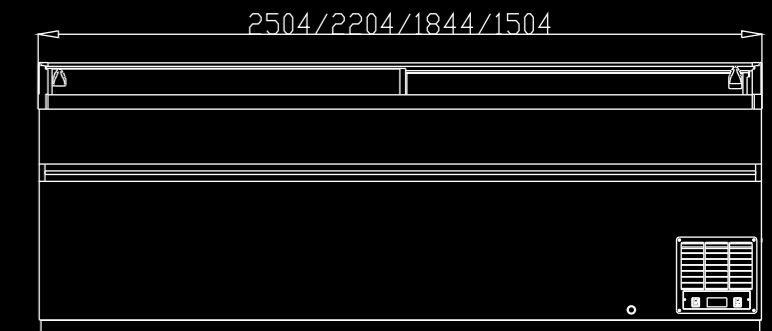

\* All comparisons are based on the product performances of last generation.